

# Limits on the Robustness of MIMO Joint Source-Channel Codes

Mahmoud Taherzadeh and H. Vincent Poor

Department of Electrical Engineering, Princeton University,  
Engineering Quadrangle, Olden Street Princeton, NJ 08544  
e-mail: {mtaherza, poor}@princeton.edu

**Abstract**—In this paper, the theoretical limits on the robustness of MIMO joint source channel codes is investigated. The case in which a single joint source channel code is used for the entire range of SNRs and for all levels of required fidelity is considered. Limits on the asymptotic performance of such a system are characterized in terms of upper bounds on the diversity-fidelity tradeoff, which can be viewed as an analog version of the diversity-multiplexing tradeoff. In particular, it is shown that there is a considerable gap between the diversity-fidelity tradeoff of robust joint source-channel codes and the optimum tradeoff (without the constraint of robustness).

## I. INTRODUCTION

Many applications call for the transmission of analog sources over wireless channels. Results of research during the past decade have shown that using multiple-antenna systems can substantially improve the rate and the reliability of communications in wireless fading environments. Most research on multiple-antenna systems has focused on the transmission of digital data over multiple-input multiple-output (MIMO) channels, and the study of analog source transmission over such channels is still in its early stages. In [1], [2] and [3] some digital and hybrid digital-analog techniques are examined for joint source-channel coding over MIMO channels, and some bounds on the asymptotic exponents of the average distortion are presented. In [4], the asymptotic exponents of the probability of having a large distortion is studied. This measure, which is called the *diversity-fidelity tradeoff*, can be seen as an analog version of the well-known diversity-multiplexing tradeoff which has proven to be very useful in evaluating various digital space-time coding schemes. In [4], also some semi-robust joint-source channel codes were

proposed which can use the same joint source-channel mapping for different ranges of SNR and different ranges of desired resolution. However it was observed that there is a gap between the optimum diversity-fidelity tradeoff and the performance of those semi-robust codes. In this paper, we investigate bounds on the robustness of MIMO joint source-channel codes.

## II. SYSTEM MODEL

We consider a communication system in which an analog source of Gaussian independent samples with variance  $\sigma_s^2$  is to be transmitted over an  $(N_t, N_r)$  block fading MIMO channel where  $N_t$  and  $N_r$  are the number of transmit and receive antennas respectively. Each sequence of  $m$  samples of the source, represented by a vector  $\mathbf{x}_s$ , is transmitted over  $n$  channel uses. We assume a quasi-static fading channel in which the channel matrix  $\mathbf{H}$  is fixed during these  $n$  channel uses and changes independently for the next  $n$  channel uses. We call the ratio  $\eta = \frac{n}{m}$  the expansion/contraction factor of the system. In a general setting, the communication strategy consists of source/channel coding and source/channel decoding. As a result of source channel coding,  $\mathbf{x}_s$  is mapped into an  $N_t \times n$  space-time matrix  $\mathbf{X}$  which in turn is received at the receiver side as an  $N_r \times n$  matrix  $\mathbf{Y}$  given by

$$\mathbf{Y} = \mathbf{H}\mathbf{X} + \sqrt{\frac{N_t}{\text{SNR}}} \mathbf{W}$$

in which SNR is the average signal to noise ratio at each receive antenna, and  $\mathbf{W}$  is the normalized additive noise matrix at the receiver whose entries are taken to be  $\mathcal{CN}(0, 1)$  (the real variance of the noise is  $\sigma^2 = \frac{N_t}{\text{SNR}}$ ). At the receiver side, the source/channel decoder yields an estimate of  $\mathbf{x}_s$  from  $\mathbf{Y}$  as  $\hat{\mathbf{x}}_s$ . For a specific channel realization  $\mathbf{H}$ , the distortion measure is

$$D(H) = \mathbb{E}_{\mathbf{x}_s} \{ \|\mathbf{x}_s - \hat{\mathbf{x}}_s\|^2 | \mathbf{H} \}. \quad (1)$$

For any specific strategy, we define the  $f$ -fidelity event as  $\mathcal{A}(f) = \{\mathbf{H} : D(\mathbf{H}) > \text{SNR}^{-f}\}$  and we call  $f$  the fidelity exponent. For specific values of  $\eta$ ,  $N_t$  and  $N_r$ , we define

$$d(f) = \lim_{\text{SNR} \rightarrow \infty} -\frac{\log \Pr\{\mathcal{A}(f)\}}{\log \text{SNR}}. \quad (2)$$

We call  $d(f)$  the diversity, and denote its maximum (over all possible source-channel coding schemes) as  $d^*(f)$ .

In [4], it is shown that the optimal diversity (if we can use different source-channel codes for different SNR values and different fidelity exponents) can be characterized as

$$d^*(f) = \left(N_t - \frac{f}{2\eta}\right) \left(N_r - \frac{f}{2\eta}\right) \quad (3)$$

for integer values of  $\frac{f}{2\eta}$ .

### III. BOUNDS ON THE DIVERSITY-FIDELITY TRADEOFF OF A SINGLE MIMO SOURCE-CHANNEL MAP

In this paper we investigate upper bounds on the diversity-fidelity tradeoff, when the joint source-channel code is fixed. In the general case, this joint source-channel code is a mapping from the set of all  $m$ -tuples of source samples to  $\mathcal{F}$ , the set of transmitted vectors (or the modulation set), which is a subset of  $\mathbb{R}^{2nN_t}$  (or indeed  $\mathbb{C}^{nN_t}$ ). We assume that  $N_r \geq N_t$ . Also, we focus on the case in which the source is uniformly distributed on  $[0, 1]$ , which has variance  $\frac{1}{12}$ .

To obtain bounds on the diversity-fidelity tradeoff of a single MIMO source-channel map, we use the concept of *box-counting dimension* [5]. If we partition the space into a grid of cubic boxes of size  $\sigma$ , and consider  $N_\sigma$  as the number of boxes that intersect the set  $\mathcal{F}$ , the box-counting dimension of  $\mathcal{F}$  is defined as

$$\text{Dim}(\mathcal{F}) \triangleq \lim_{\sigma \rightarrow 0} \frac{\log N_\sigma}{\log \frac{1}{\sigma}}. \quad (4)$$

We modify this definition and define the  $c$ -effective box-counting dimension (for  $0 < c \leq 1$ ) of a modulation set as

$$\text{Dim}_c(\mathcal{F}) \triangleq \lim_{\sigma \rightarrow 0} \frac{\log N'_{c,\sigma}}{\log \frac{1}{\sigma}} \quad (5)$$

where  $N'_{c,\sigma}$  is the minimum number of those boxes whose total probability of containing the modulated signal is at least  $c$ .

**Theorem 1** Consider a space-time joint source-channel coding with modulation set  $\mathcal{F}$  (mapping  $m$ -dimensional source vectors to  $2nN_t$ -dimensional transmitted vectors). If for every  $c > 0$ , the  $c$ -effective box-counting dimension of  $\mathcal{F}$  is at least  $2n\beta$  and at most  $2n\beta'$ , then for any  $0 \leq f \leq 2\eta\beta'$ , we have

$$d(f) \leq (N_r - \beta + 1)(N_t - \beta + 1) \left(1 - \frac{f}{2\eta\beta'}\right). \quad (6)$$

*Proof:* For any positive numbers  $0 < c_1 < c_2 < 1$ , if  $\text{Dim}_{c_1}(\mathcal{F}) = \beta_1$  and  $\text{Dim}_{c_2}(\mathcal{F}) = \beta_2$ , then  $2n\beta' \geq \beta_1 \geq \beta_2 \geq 2n\beta$ , and for any  $\sigma$  and for any of the boxes corresponding to  $c_1$ , the probability of containing the modulated signal is at least in the order of  $\sigma^{\beta_2}$  and their number is of the order of  $\sigma^{-\beta_1}$ . Based on the monotonicity of  $\text{Dim}_c(\mathcal{F})$ , we can find  $c_1$  and  $c_2$  such that  $\beta_1$  and  $\beta_2$  are arbitrarily close to each other.

Now we look at the received modulation set  $\mathbf{H}\mathcal{F}$ . We denote the nonzero eigenvalues of  $\mathbf{H}\mathbf{H}^H$  by  $0 < \lambda_1 \leq \dots \leq \lambda_{N_r}$ , and consider  $\alpha_i = \frac{\log \lambda_i}{\log \sigma}$ . If  $\alpha_i \geq 1$  (for  $1 \leq i \leq N_t - \beta + 1$ ), then  $\mathbf{H}\mathcal{F}$  (and all the boxes corresponding to  $c_1$ ) will be inside a  $2nN_t$ -dimensional orthotope whose volume is less than  $\sigma^{2n(N_t+1-\beta)}$ . In this case, because the order of the number of the boxes corresponding to  $c_1$  is greater than  $\sigma^{-2n\beta}$ , the majority of them (with their portion approaching to 1) become adjacent to other boxes (with a distance less than  $\sigma$ ). Also, because of the isotropy of the channel distribution and the eigenvectors of  $\mathbf{H}$ , with probability approaching to 1, this also includes boxes containing the mapping of distant sub-segments of the source. Therefore, in this case, the distortion becomes lower bounded by a positive number, and hence the fidelity exponent will be  $f = 0$ .

Thus, to bound  $d(0)$  we need only to bound  $\Pr\{\alpha_i \geq 1 | 1 \leq i \leq N_t - \beta + 1\}$ . Similarly to [6], we can bound it as <sup>1</sup>

$$\Pr\{\alpha_i \geq 1 | 1 \leq i \leq N_t - \beta + 1\} \doteq \frac{1}{\text{SNR}^{-(N_t-\beta+1)(N_r-\beta+1)}}$$

$$\Rightarrow d(0) \leq (N_t - \beta + 1)(N_r - \beta + 1). \quad (7)$$

For  $f > 0$ , we use a similar approach, by considering the effect of the channel on the boxes of size  $\sigma$  inside larger boxes of size  $\sigma^{\frac{f}{2\beta'\eta}}$  (containing at least approximately  $\sigma^{-\frac{f}{2}}$  smaller boxes). Consider  $\alpha' = \frac{\log \lambda_i}{\log \sigma^{(1-\frac{f}{2\beta'\eta})}}$ . Now if  $\alpha'_i \geq 1$  (for  $1 \leq i \leq N_t - \beta + 1$ ),

<sup>1</sup>In this paper, we use  $a \doteq b$  to denote that  $a$  and  $b$  are asymptotically equivalent.

similarly to the case of  $f = 0$ , we can show that the distortion will be at least on the order of  $\sigma^{2f}$  (or  $\text{SNR}^{-f}$ ). Therefore, we have

$$d(f) \leq (N_r - \beta + 1)(N_t - \beta + 1) \left(1 - \frac{f}{2\eta\beta'}\right). \quad (8)$$

■

**Theorem 2** Consider a space-time joint source-channel coding with modulation set  $\mathcal{F}$  (mapping  $m$ -dimensional source vectors to  $2nN_t$ -dimensional transmitted vectors). If for some  $c > 0$  the  $c$ -effective box-counting dimension of  $\mathcal{F}$  is at most  $2n\beta$ , then the coding scheme cannot achieve a fidelity exponent larger than  $2\eta\beta$ .

*Proof:* If we divide the signal space into boxes of size  $\sigma$ , the number of boxes corresponding to  $c$  is bounded by the order of  $\sigma^{-2n\beta}$ . If we divide the subset of source vectors (that are mapped into these boxes) to  $\sigma^{2n(-\beta-\varepsilon)}$  sub-cubes whose size is on the order of  $\sigma^{2\eta(\beta+\varepsilon)}$ , a large portion of them will be adjacent to each other (with a distance less than  $\sigma$ ), hence  $\Pr\{D > \text{SNR}^{-2\eta(\beta+\varepsilon)}\}$  can be lower bounded by a positive number. This argument is valid for any small  $\varepsilon$ . Thus, the fidelity exponent cannot be larger than  $2\eta\beta$ . ■

**Corollary 1** No single joint source-channel mapping can achieve any point on the optimum diversity-fidelity curve, other than the two extreme points,  $d = 0$  or  $f = 0$ .

Theorems 1 and 2 show that the effective dimensionality of the analog modulation set is a key factor in determining its asymptotic performance. While low-dimensional mappings are incapable of achieving a high fidelity exponent, high-dimensional mappings cannot achieve a high diversity order. This is totally different from the case of digital space-time coding, in which many full-rank lattice codes can be used to construct diversity-multiplexing-tradeoff-achieving space-time codes (assuming that maximum-likelihood decoding is performed at the receiver).

#### IV. CONCLUSIONS

In this paper, we have introduced an upper bound on the diversity-fidelity tradeoff of single-mapping MIMO source-channel codes. This result shows that, unlike the case of a single-input/single-output (SISO) channel (in which we can achieve the optimum signal-to-distortion-ratio (SDR) scaling by using a single mapping [7]), in

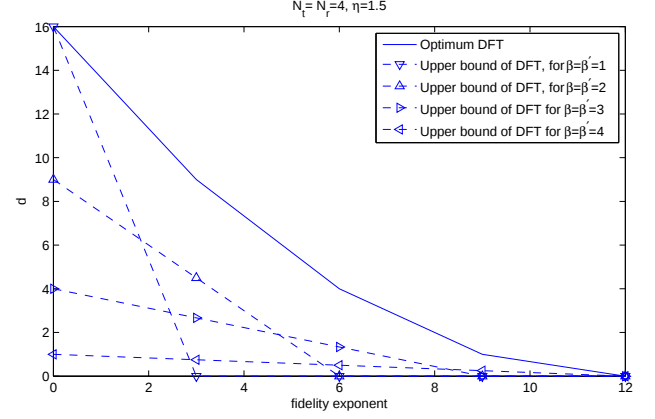


Fig. 1. Bounds on the diversity-fidelity tradeoff of robust codes (depending on their effective dimensions) for 4 transmit and 4 receive antennas and bandwidth expansion  $\frac{3}{2}$ .

the MIMO case there is a considerable gap between the asymptotic performance of a single robust mapping and the optimum tradeoff.

#### REFERENCES

- [1] D. Gündüz and E. Erkip, "Distortion exponents of MIMO fading channels," in *Proceeding of the IEEE Information Theory Workshop*, (Punta del Este, Uruguay), pp. 694 – 698, July 2006.
- [2] G. Caire and K. Narayanan, "On the distortion SNR exponent of hybrid digital analog space time coding," *IEEE Trans. Inf. Theory*, vol. 53, pp. 2867 – 2878, August 2007.
- [3] K. Bhattad, K. Narayanan, and G. Caire, "On the distortion exponent of some layered transmission schemes," in *Proceedings of the Asilomar Conference on Signals, Systems and Computers*, (Pacific Grove, CA), Nov. 2006.
- [4] M. Taherzadeh and A. K. Khandani, "Diversity-fidelity tradeoff in transmission of analog sources over MIMO fading channels," in *Proceedings of the Asilomar Conference on Signals, Systems and Computers*, (Pacific Grove, CA), Oct. 2008.
- [5] G. A. Edgar, *Measure, Topology and Fractal Geometry*, ch. 6. Berlin: Springer-Verlag, 1990.
- [6] L. Zheng and D. Tse, "Diversity and multiplexing: A fundamental tradeoff in multiple-antenna channels," *IEEE Trans. Info. Theory*, pp. 1073–1096, May 2003.
- [7] M. Taherzadeh and A. K. Khandani, "Robust joint source-channel coding for delay-limited applications," in *Proceedings of the 2007 IEEE International Symposium on Information Theory*, (Nice, France), June 2007.